

ALL STEEL CONSTRUCTION. THE STRONGEST CONVEYORS IN THE WORLD.

# NESTAFLEX®

SMART DESIGNS COME FROM SMART SOLUTIONS.



ALL  
STEEL  
BUILT

## NTL DRIVE OUT BOOM

HEAVY DUTY DRIVE OUT BELT LOADER

HEAVY DUTY DRIVE OUT ZPA ROLLER LOADER

For tough loading and unloading applications, the NTL rigid, drive-out extendable conveyor system is the perfect solution. With its heavy-duty, all-steel construction and oversize wheels, the NTL is built to withstand contact in high-forklift-traffic areas.

Powered belt, gravity roller and minimum pressure accumulation make the NTL ideal for trailer applications from 20-55 feet, including distribution centers, parcel/postal facilities, food/grocery applications and third-party logistics. The photo eye flow-control system properly controls package feed to ensure that packages are always present with minimal backpressure, maximizing operator productivity.

With the NTL, loading and unloading operations are fast, safe and easy. Controls conveniently located on the front of the boom include belt start/stop buttons, extend/retract buttons, emergency stop, pullout tray brake, extension stop bar, and the optional fan and manual or power steering. The unit's VFD system can flow product at rates up to 150 feet per minute.

Optional side rails give you even greater control and reduce the need for operator supervision during accumulation operations. With the gravity pull out tray or the fixed gravity discharge ends on the NTL and all the other options, there is a NTL version that is right for you.

Call us today and let us work with you to find the Smart Solution for your distribution needs!

Flexible Material Handling

SMART SOLUTIONS™

www.flexmh.com

800-669-1501

# NESTAFLEX®


SMART DESIGNS COME FROM SMART SOLUTIONS.

## SPECIFICATIONS

| Model Number | EXT Length | Comp. Length |
|--------------|------------|--------------|
| NTL-35/45    | 45'        | 35'          |
| NTL-40/50    | 50'        | 40'          |
| NTL-45/55    | 55'        | 45'          |
| NTL-50/60    | 60'        | 50'          |
| NTL-55/65    | 65'        | 55'          |



Example model lengths with a variety of configurations. We can help you design the model that is the right fit for your application.

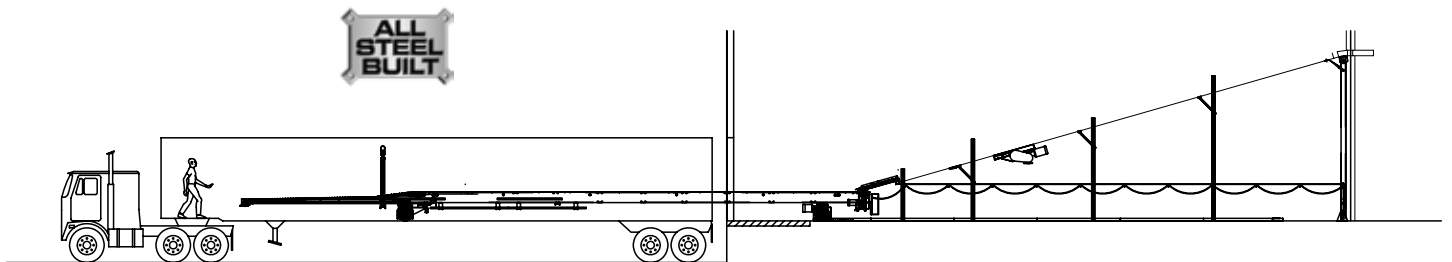

## STANDARD FEATURES

- 12" Structural Steel Frame
- 18" Solid Rubber Tires
- Various Conveying Widths Available
- 460VAC 3 Phase Power
- Manual Steering (5 degrees L – R)
- 1.5 HP Drive
- 3 HP Belt Drive

## ADDITIONAL OPTIONS AND BENEFITS

- Light and Fan Kits
- 2" Roller Centers
- ABEC Sealed Precision Bearings
- 230VAC 3 Phase Power
- Herringbone Transition
- Operator Controls for Upstream Conveyors
- Other Widths and Lengths Available
- Carton Guides Full Length of Conveyor
- Optional Power Steering

## Custom Installation!

Contact us for your installation needs, making sure your equipment is installed quickly, correctly, and giving you a worry free start up!

Flexible Material Handling

SMART SOLUTIONS™

www.flexmh.com  
800-669-1501